


FLEX-MAT®

HIGH VIBRATION WIRE SCREEN

TENSIONED SERIES

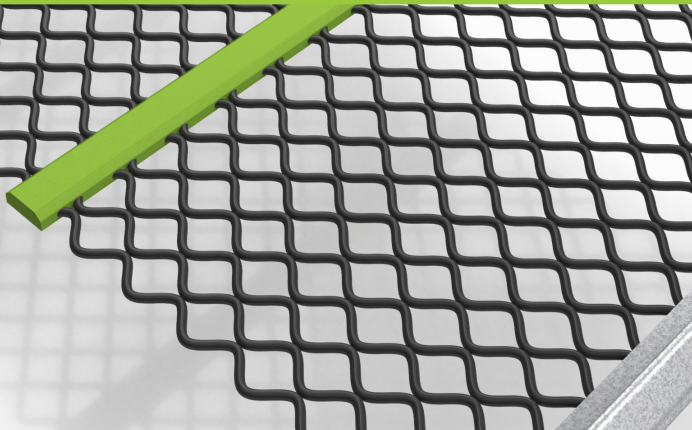

TENSIONED
SERIES

D

- Standard pattern
- Square opening
- Equivalent to square woven
- Precise sizing

> Opening Sizes

0.059" – 4"
1.5 mm – 101.6 mm




TENSIONED
SERIES

DD

- For high-impact and heavy-material applications as it absorbs impact better than other applications
- Eliminates the "popcorn effect" caused by larger, single wires

> Opening Sizes

1.125" – 4"
28.6 mm – 101.6 mm

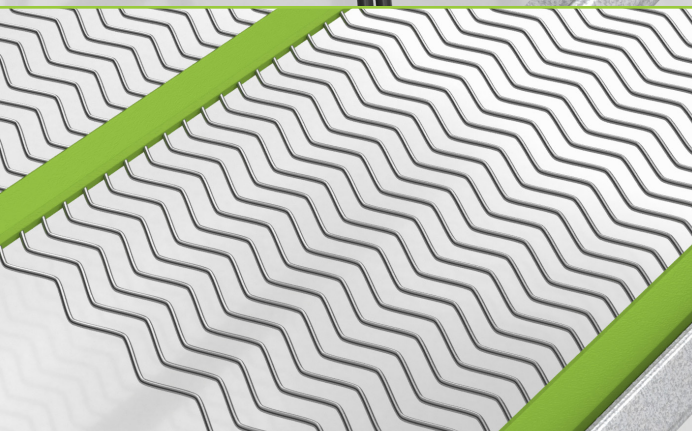

TENSIONED
SERIES


S

- Used with round or cubical-shaped material, or when precise passing is not required, Flex-Mat S allows you to:
 - Maximize open area
 - Eliminate blinding
 - Reduce fines

> Opening Sizes

0.059" – 2"
1.5 mm – 50.8 mm

TENSIONED SERIES

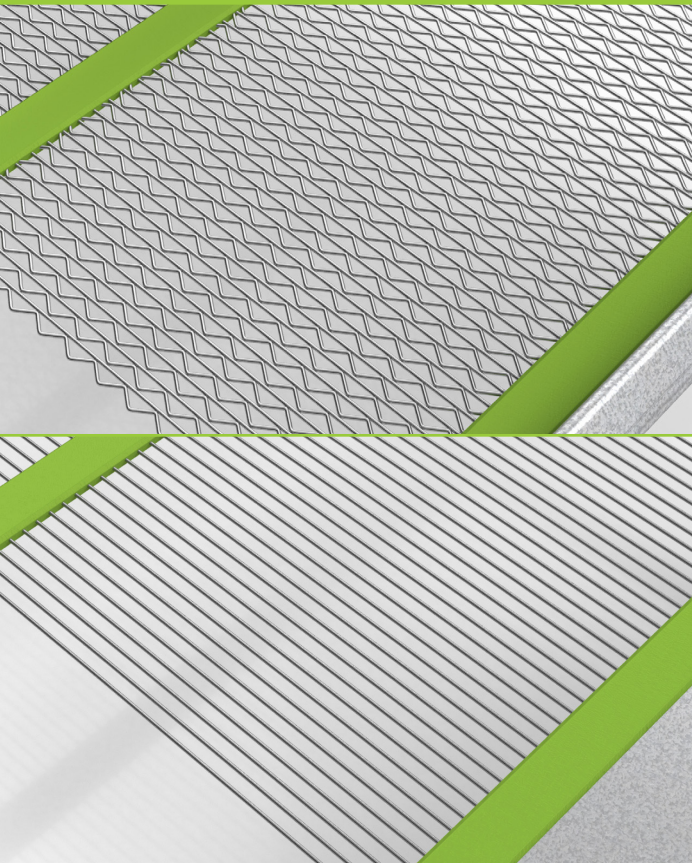

**TENSIONED
SERIES**

T

- Ideal for openings under 0.059" or 1.5 mm
- Replaces fine mesh to better reduce blinding

> Opening Sizes

0.020" – 2"
0.5 mm – 50.8 mm



**TENSIONED
SERIES**

L

- Maximum open area for desanding and removing fines
- Lasts longer than traditional harp/piano wire, while keeping material in spec
- Ideal for compost and topsoil

> Customized to specific applications

Starting at 0.031"
0.8 mm

